

Vetter EIS: E-Vehicle Isolation System

Securing, cooling and transporting away electric vehicles:
less water, greater effect!



Place your trust in emergency pneumatics!

We will be able to help you.

Vetter GmbH
A Unit of IDEX Corporation

Blatzheimer Str. 10-12
53909 Zülpich
Germany

vetter.de

© Copyright | 06.2022 | Vetter GmbH | Subject to change without notice. Errors and omissions excepted.

Sales

Tel: +49 (0) 22 52 / 30 08 - 0
Fax: +49 (0) 22 52 / 30 08 - 590
E-Mail: vetter.info@idexcorp.com


Vetter E-Vehicle Isolation System (EIS)

System for cooling and safe storage of electric cars

The continuous and **safe cooling, isolation, transport** and **compact storage** of burnt-out electric vehicles with lithium-ion batteries has presented rescue services, towing services and workshops with huge challenges until now. Self-ignition following the initial extinguishing is an incalculable risk for everyone involved. We are changing that with the Vetter E-Vehicle Isolation System (EIS):

Vetter EIS: light, compact and resource-saving

After extinguishing the burning vehicle, the EIS is attached to the vehicle and flooded. Once the complete battery unit is under water, the vehicle can be **lifted, transported away** and **stored in a compact manner** in the EIS until its final disposal.

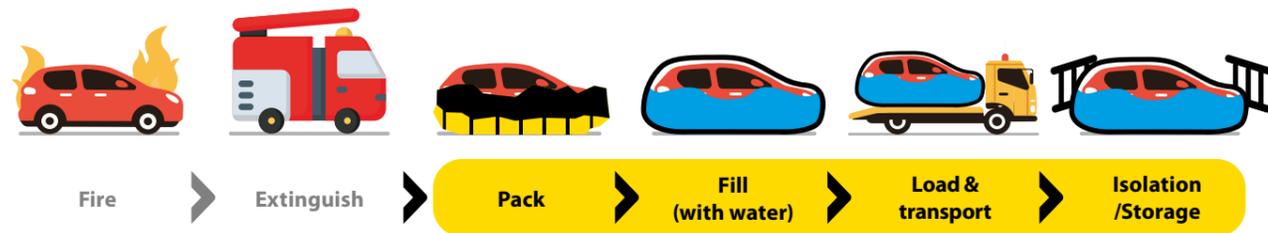

Lifting straps:

Simple lifting for transporting the vehicle away. *(not included in the set)*



Loading:

Fastenings for safe transport on the towing vehicle.



Automatic lashing straps (9 x black):

For fixing the vehicle in the EIS. They ensure a good contour fit and minimal use of water.



Hose connection:

C-Storz coupling for flooding the EIS.



Lashing straps (4 x yellow):

For fixing the EIS in the direction of travel.



Water level hose:

Check the water level in the EIS.

EIS System: 1110021800*



Size cm	500 x 250 x 120	Lifting slings hanger	4-strand belt sling (DIN EN 1492-1 conformity), 6,300 kg load capacity
Pack size cm	80 x 43 x 60	Water level indicator	PVC hose with screw connection and fitting valve
Weight, approx. kg	46	2 Lifting straps (not included in the set)	We recommend two lifting straps for safe lifting.
Persons required	3	2 Vetter lifting bags (not included in the set)	We recommend two lifting bags for safe lifting of the car.
Material	PVC coated polyester fabric on both sides (according to DIN EN 12641-2)		
Tension straps	9 x black automatic tension straps, 4 x yellow tension straps		

*Technical changes reserved.